


# BRACO COPPER CRIMPING PIN TERMINALS (NON-INSULATED AND INSULATED)

Braco Pin Terminals are designed to offer maximum efficiency under heavy-duty applications. Therefore these terminals are ideal for use in applications which are subject to continuous mechanical vibrations viz. engines, railways, moving components etc. The terminal barrel is brazed and soft annealed, which means that the terminal can be crimped in either direction.

All the terminals are tin plated to avoid oxidisation and to achieve maximum corrosion protection. These terminals can be provided with PVC sleeves for protection against electrical shocks and can also be provided with metal reinforced sleeves to maintain a proper grip on conductor insulation.

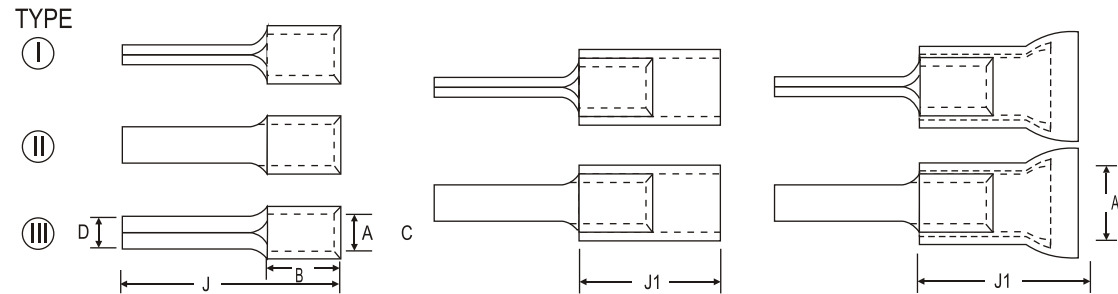

**Material Copper BS :1897**  
**Finish : Electro Tinned**

Size Sq. mm	Dimensions					TYPE	Code No. J-1	Code No. A-1	Code No. J-1	Code No.		
	A	C	D	B	J							
1.5	1.6	3.2	1.9	5	17	I	P - 9	10	PI - 17	3.6	10	PD - 26
	1.6	3.2	3.1	5	17	II	P - 35	10	PI - 40	3.6	10	PD - 42
2.5	2.3	3.9	1.9	5	17	I	P - 1	10	PI - 18	4.4	10	PD - 27
	2.3	3.9	3.1	5	17	II	P - 2	10	PI - 19	4.4	10	PD - 28
4	2.9	4.9	2.7	6	20	I	P - 3	14	PI - 20	6.4	15	PD - 29
	3.6	5.6	5.1	6	20	II	P - 4	14	PI - 21	6.4	15	PD - 30
6	3.6	5.6	2.7	6	20	I	P - 5	14	PI - 22	6.4	15	PD - 31
	4.0	6.0	2.7	6	20	I	P - 6	14	PI - 23	6.4	15	PD - 32
10	4.5	6.7	4.3	8	22	III	P - 7	16	PI - 24			
16	5.8	8.2	5.5	10	26	III	P - 8	20	PI - 25			
25	7.5	11.1	7.0	11	31	III	P - 86					
35	9.0	12.6	8.0	12	37	III	P - 87					
50	10.5	14.1	9.0	16	42	III	P - 88					
70	12.0	16.0	10.0	18	45	III	P - 94					
95	13.8	18.7	11.0	21	52	III	P - 95					



Colour Coding for Insulated Terminals :-  
● 1.5 ● 2.5 ● 4.6